

BACK TO WORK SAFELY

Verify Face even with Mask On



a visible light facial recognition access control device that withstands direct strong light exposure. This product supports multiple verification methods including Face, Fingerprint, Palm & Password. It is embedded with a Face-with-Mask reading and fever detection feature that can examine a person's body temperature even with a face mask on. The extra wide angle recognition with up to 2 meters recognition distance made this device one of the fastest and contactless verification methods that significantly reduces the potential risk of cross-contamination in premises.

Suitable for all types of small and large offices.



Face Recognition Latest visible light facial recognition technology



Touchless Verification Contactless palm recognition



Large Capacity Store up to 6,000 faces, 4,000 palms and 20,000 transaction logs



Fever Detection Deny access when fever symptom is detected




Detection Deny access to those who are not wearing a mask



Elegant Design A compact and slim device to fit dimensions of a door frame installation



SYSTEM DIAGRAM

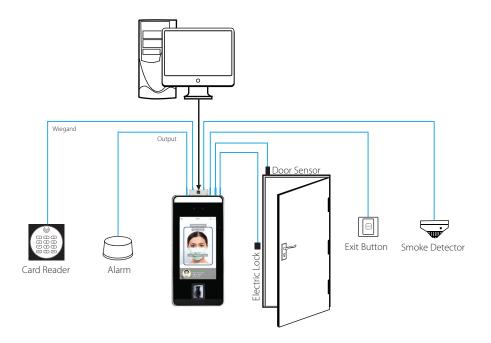

SPECIFICATIONS



MODEL	Details
PRODUCT DIMENSION (W X H X D), mm	91.93 x 220 x 22.5
MICROPROCESSOR	900MHz Dual Core CPU
MEMORY	512MB RAM/8G Flash
STORAGE	
• Faces	6,000
Fingerprint	6,000
• Palm	3,000
Transactions	200,000
OPERATING ENVIRONMENT	
Temperature	16°C ~ 32°C
Humidity	10% ~ 90%
Power Input	DC12V 3A
COMMUNICATIONS	
• Method	TCP/IP, RS485, Wi-Fi (Optional)
• Wiegand	Input/Output
ACCESS CONTROL	
Lock Relay Output	Yes
Alarm Output/Auxiliary Input	Yes
Exit Button/Door Sensor	Yes
PREVENTIVE MEASURES	
Mask Detection	Yes
Fever Detection	Yes
Fever Measurement Distance	30cm - 50cm
Fever Detection Speed	>0.3s
Temperature Measurement Range	34°C ~ 45°C
Temperature Measurement Accuracy	±0.3°C

Note: Specifications are subject to change without prior notice.

Authorized Reseller:

Mobile : +966544613441
eMail : it@ebtco.com
Website : www.ebtco.com